

Nephros Nanoguard-S Ultrafilter




NanoGuard-S

In-Line Filtration of Water For
Washing and Drinking



For Use In:

- Showers
- Ice Machines

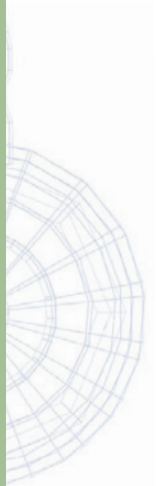

Product Summary

- Traps particulates as small as 5 nm in size
- Attains and maintains high flow rates
- Meets ASTM F838-05
- Not made with BPA
- Compact size for easy installation



Nephros, Inc.
41 Grand Ave.
River Edge, NJ 07661
Tel: (201) 343 - 5202
Fax: (201) 343 - 5207
Email: info@nephros.com

Specifications


NanoGuard-S



Specifications	NanoGuard-S
Max Inlet Pressure	75 psi (5 bar)
Max Inlet Temperature	60°C (140°F)
<u>Max # of Cycles</u>	
In-Line Use	5,000
Open Discharge	500
<u>Filter Membrane</u>	Medisulfone [®]
Material	Polysulfone
Pore Size	5 nm
MW Cut-Off	15 kDa
	Meets ASTM F838-05
Dimensions	7" L x 2.5" D
Connections	CPC (APC) 1/2" NPSM
Expected Life	1-3 months

Medisulfone[®] is a registered trademark of Medica S.p.A.

NanoGuard-S - Clean Water Flow

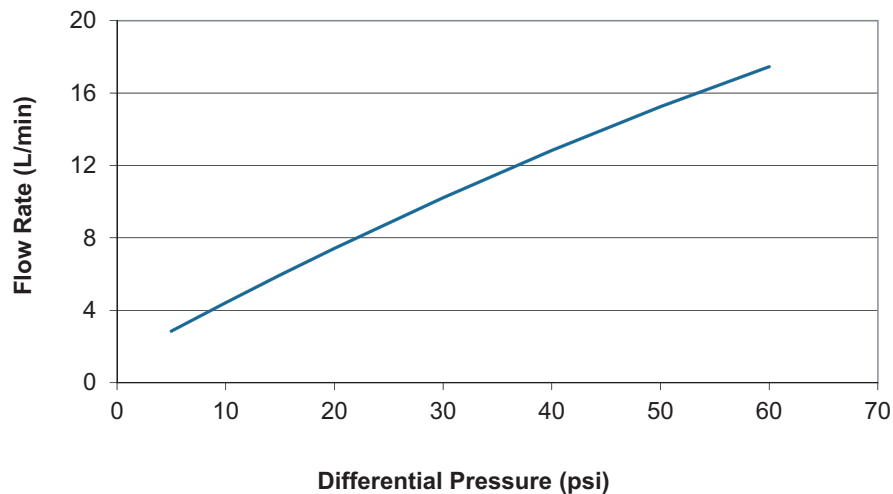

NanoGuard-S ultrafilter has a hydrophobic membrane that effectively retains particulate as small as 5 nm. The water permeability of the NanoGuard membrane is more than double that of membranes with comparable pore size, thus providing superior flow performance relative to the physical size of the filter.

Product Code

70 - 0253 NanoGuard-S Quick Connect
70 - 0254 NanoGuard-S Threaded End

Install Kits

70 - 0261 Shower Install Kit
70 - 0260 In-Line Install Kit