


NanoGuard[®] - C Ultrafilter

- Designed for commercial and industrial applications
- Available in 10" and 20" cartridges with 222 O-ring connection
- Reduces TSS and traps particles as small as 5nm in size
- Expected life up to 10,000 gallons of water
- Can be disinfected in place with 1% bleach solution



Contact us for more information

(201) 343-5202


sales@nephros.com

Provides the ultimate barrier for particles and your most challenging water conditions.

Specifications

Compatible Disinfection⁽¹⁾	Chemical – 1% Bleach
Max Inlet Temperature	35° C (95°F)
Max Inlet Pressure	75 psi (5 bar)
Material	Polysulfone
Pore Size	5 nm
Size	10" and 20" L x 2.5" D
Membrane Surface Area	2.6, 5.2m ²
Connection	222 O-Ring
Expected Life⁽²⁾	Up to 10,000 Gallons

Clean Water Flow

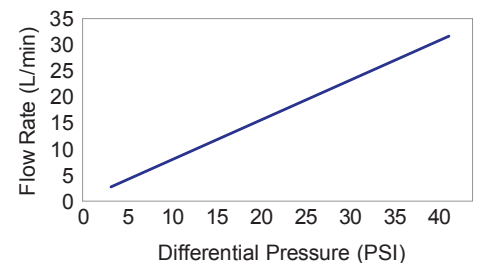

Product Numbers

70-0501 NanoGuard-C 10" Cartridge Ultrafilter
70-0520 NanoGuard-C 20" Cartridge Ultrafilter
70-0116 10" Housing Kit, Reverse Flow

(1) Contact Nephros for additional disinfection methods

(2) Expected life depends on water quality